

Air Treatment

Mechanically Actuated Drain Traps



Mechanically actuated traps

Kaeser's mechanically actuated traps are designed for heavy duty service. With only two moving parts, they are exceptionally reliable. Best of all, they are versatile and can be adapted to a wide range of applications. Impervious to synthetic lubricants, models are available for maximum working pressures to 500 psig. Stainless steel models are also available. Top connection models are ideal for applications where there is ample room to suspend the drain trap below a vessel. Bottom connection models are designed for applications where there is minimal clearance between the vessel being drained and the floor.

Eliminate the cost of manual operation

Kaeser compressed air condensate drain traps automatically discharge moisture and oil from compressed air systems. Typical applications include draining condensate from separators, receiver tanks, intercoolers, aftercoolers, dryers, filters, and drip legs.

Using Kaeser drain traps in your compressed air system reduces plant operating costs. There is no longer a

need to waste expensive compressed air through pet-cocks and valves left open to bleed off condensate. Work hours spent manually draining compressed air lines and equipment can also be reduced.

Unattended drain lines in your compressed air system can fill with liquid, flood the system, and interfere with production equipment. Kaeser's drain traps operate automatically and eliminate these risks.

Standard Features:

- Robust steel construction
- Wide variety of applications
- Two different connections available
- Impervious to synthetic lubricants

Technical Specifications


Model	Capacity @ 100 psig (gal./hr.)	Max. Working Pressure (psig)	Inlet/Outlet Connection Location	Inlet NPTF (in.)	Outlet NPTF (in.)	Weight (lb.)
ADT 20 M	0.3	175	Top	1/2	5/16	2
ADT 190	3	300	Top	3/4	1/4	8
ADT 190 B		Bottom	8.5			
ADT 190 H		Top	9			
ADT 190 S		Top	9			
ADT 1514	24	300	Top	3/4	1/4	12
ADT 1514 B		Bottom	12.5			
ADT 1514 H		Top	13			
ADT 1514 S		Top	13			

Specifications are subject to change without notice.

Installation

Inlet piping: It is best to install a Kaeser Drain Trap below the level of the device being drained to allow condensate to flow by gravity. An isolation service valve is recommended before the drain valve. A line should be installed from the drain discharge to an oil water separator such as Kaeser's Condensate Filter (KCF). The separation reclaims oil from the condensate and separates the water that can be discharged into most municipal sanitary sewers. Kaeser drains control condensate at many locations including:

- A** Compressor aftercooler discharge
- B** Separators
- C** Dryers
- D** Filters

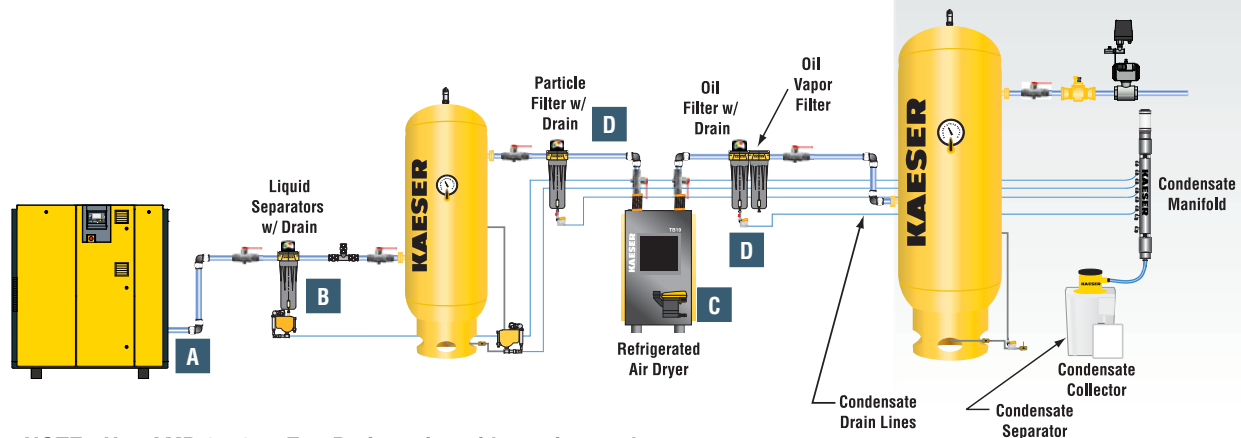

NOTE: Use AMD 6550 or Eco-Drain series with receiver tanks.

KAESER COMPRESSORS

Built for a lifetime.™



www.kaeser.com

Kaeser Compressors, Inc.
511 Sigma Drive
Fredericksburg, VA 22408 USA
Telephone: 540-898-5500
Toll Free: 800-777-7873
info.usa@kaeser.com

Kaeser Compressors Canada Inc.
3760 La Verendrye Street
Boisbriand, QC J7H 1R5 CANADA
Telephone: (450) 971-1414
Toll free: (800) 477-1416
info.canada@kaeser.com

Kaeser Compresores de México S de RL de CV
Calle 2 #123
Parque Industrial Jurídica
76100 Querétaro, Qro.
Telephone: 01 (442) 218 64 48
sales.mexico@kaeser.com

Kaeser Compresores de Guatemala y Cia. Ltda.
Calz. Atanasio Tzul 21-00, zona 12
El Cortijo II, Bodega 501
01012-Guatemala City
Telephone: +502 2412-6000
info.guatemala@kaeser.com

Certified Management Systems

